

Liebert® PSP

Best-Value Power Protection for PCs and Peripherals



Liebert PSP is a full featured UPS that delivers cost-effective power protection in a compact package.

The UPS provides battery-backed outlets and a surge protection-only outlet. The UPS battery offers four minutes of backup power at full load - ample time to shut down protected equipment if an outage occurs.

Shutdown software and a USB cable are also included, to allow remote alerts and automated graceful shutdown of the connected equipment.

Liebert PSP UPS Supports Your Sensitive Electronics With These Standard Features:

Flexibility

- Three battery-backed UPS outlets, and one surge protection-only outlet differentiated by color
- USB port, MultiLink Software shutdown software, and USB cable
- User replaceable batteries

Higher Availability

- Up to four minutes of battery backup time at full load. Protects against lightning, spikes and surges
- Full sequenced battery testing to ensure batteries are available when needed
- Advance early warning of UPS shutdown
- RJ-45 port for data line surge protection

Lowest Total Cost Of Ownership

- Two-Year replacement warranty
- Optional one year warranty extension

The Liebert PSP Is Ideally Suited For:

- Professional workstations
- Small routers and bridges
- Point-of-sale terminals
- Other sensitive electronics




Liebert® PSP Specifications

Model Number	PSP500MT3-230U	PSP650MT3-230U
Capacity VA/W	500 / 300	650 / 390
Net Weight: kg	3.9	
Shipping Weight: kg	4.8	
Dimensions: W x D x H, mm	87 x 215 x 251	
On-Line Mains Voltage	160-287VAC	
On-Line Frequency	50/60Hz ±5Hz	
Output Voltage (Mains Normal)	Typical 160-287VAC	
Output Voltage (Battery Operation)	230VAC ±5%	
On-Battery Wave Form	Stepped Sinewave	
Battery Type - VDC x Ah - Quantity	12V x 7.2Ah x 1	
Typical Recharge Time	6-8 hours to 90%	
Audible and Visual	Audible alarm / LED	
Backup Sockets	IEC 320 C13 (3)	
Surge Sockets	IEC 320 C13 (1)	
Operating Temperature, °C	0 to 40	
Storage Temperature, °C	-15 to 40	
Operating / Storage Relative Humidity	0%-90%, non-condensing	
EMI Classification	Class B	
Agency		
Safety	IEC/EN/AS 62040-1-1	
EMC	EN 62040-2:2005 Class B IEC 61000-4-2 Electrostatic discharge IEC 61000-4-3 Radiated E-RFI fields IEC 61000-4-4 Fast E transients IEC 61000-4-5 Surges/Lightning IEC 61000-4-6 Conducted RFI	
Transportation	ISTA Procedure 1A Certification	
Warranty	2 years standard (+ 1 year warranty extension available)	
Packaging	User Manual on CD, Software CD, USB cable, Safety Instruction Sheet, Environment protection sheet	

Load Autonomy

Load (watts)	PSP500MT3-230U	PSP650MT3-230U
50	55	56
100	18	18
150	11	12
200	8	8
250	5	5
300	3	4
350	0	3

Note: All run times are in minutes, assume fully charged batteries and are typical at 25°C (77°F) with resistive loads.

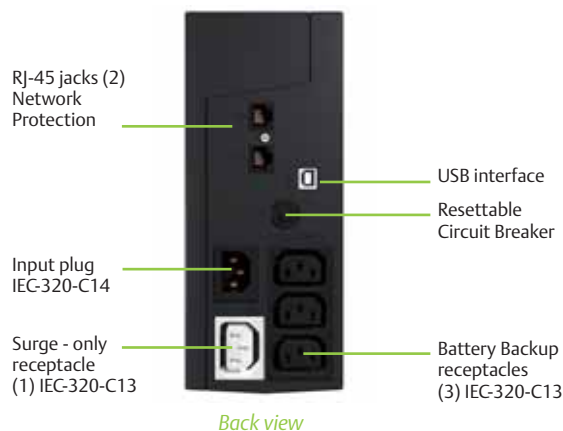

Communications/Shutdown Software:

Windows built-in power management functions provide monitoring of UPS status and manage the automatic orderly shutdown of the computer if a power outage ever exceeds the battery capacity of the UPS. Liebert Multilink shutdown and monitoring software is also provided.

Locations

Emerson Network Power

Via Leonardo Da Vinci 16/18
Zona Industriale Tognana
35028 Piove di Sacco (PD) Italy
Tel: +39 049 9719 111
Fax: +39 049 5841 257
marketing.emea@emersonnetworkpower.com

Via Fornace, 30
40023 Castel Guelfo (BO) Italy
Tel: +39 0542 632 111
Fax: +39 0542 632 120
enquiries.chloride@emerson.com

United States

1050 Dearborn Drive
P.O. Box 29186
Columbus, OH 43229
Tel: +1 614 8880246

Asia

7/F, Dah Sing Financial Centre
108 Gloucester Road, Wanchai
Hong Kong
Tel: +852 2572220
Fax: +852 28029250



Tech Support

Always On! Our Commitment to your daily Business, provided by our World Wide multi language Tech Support.
Toll-free **00-80011554499**
Toll **+39 02 98250222**
liebert.upstech@emerson.com

While every precaution has been taken to ensure the accuracy and completeness of this literature, Liebert Corporation assumes no responsibility and disclaims all liability for damages resulting from use of this information or for any errors or omissions.
©2010 Liebert Corporation

All rights reserved throughout the world.
Specifications subject to change without notice.

PSP00-FLY-EN-0709-01
MKA4L0UKPSP Rev.1-07/2009

Emerson Network Power™

The global leader in enabling Business-Critical Continuity™.

- AC Power
- Connectivity
- DC Power
- Embedded Computing
- Embedded Power
- Infrastructure Management & Monitoring
- Outside Plant
- Power Switching & Controls
- Precision Cooling
- Racks & Integrated Cabinets
- Services
- Surge Protection

Emerson Network Power.com

Business-Critical Continuity, Emerson Network Power and the Emerson Network Power logo are trademarks and service marks of Emerson Electric Co. ©2010 Emerson Electric Co.